


DATA SHEET

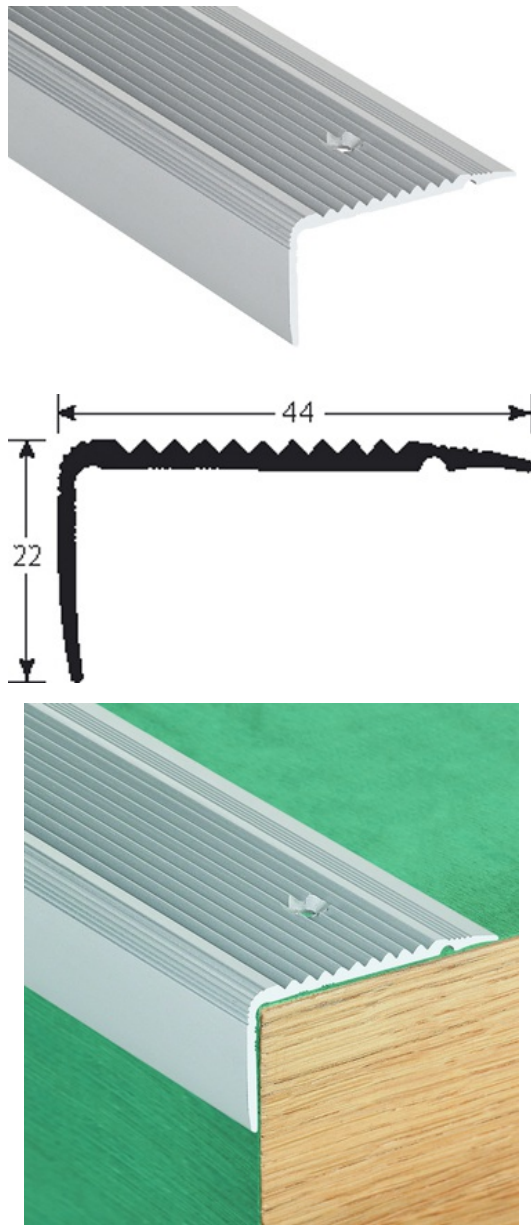

DESCRIPTION

Drilled aluminium stair-nosing, to secure stairs and reduce slip risk.
 Drilled - countersunk: to be screwed
 14 holes, first and last one at 83 mm. Holes are drilled, countersunk and deburred.

Dimensions : 44 x 22 mm
 Length : 3M

USE

For overlapping a floor covering or a parquet or concrete floor.
 Indoor use.

REFERENCE

Ref : 15303
 STAIRNOSING RENOVATION DRILL ALU SILVER 3M

MATERIAL

Alu silver - 6060TS N755-2 type top-of-the-range aluminium alloy thermically treated for higher hardness.
 Anodised (no marking clamps) in 10 microns thickness. Colors are those defined by "RAL" European standards.
 REACH compliant.

FITTING MODE

Cut the profile to the desired length. Locate the holes and drill in the subfloor. Place the ROMUS plugs 94154. Position the profile and fasten with screws.

> MAINTENANCE

For daily cleaning, use standard detergents. In case you want to use a sodium, ammoniac or acid based cleaner, carry first out a preliminary test.

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :

Project :

Email :

Tel :

Distributor :

Tel :

Email :